

Easyflush^{EVO}

WC Flushing Range


Product codes:

Mains Transformer

- EVO 1.5" (1.5" outlet fitting)
- EVO 2" (2" outlet fitting)

Battery Pack

- EVO 1.5" B (1.5" outlet fitting)
- EVO 2" B (2" outlet fitting)

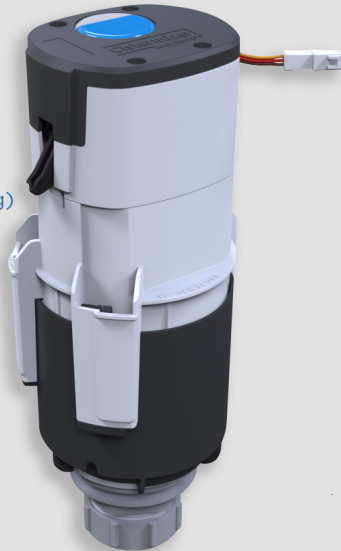

Easyflush^{EVO} WC dual flush valve with sensor

Product codes:

Mains Transformer

- EVO CISTERN

Battery Pack

- EVO CISTERN B




Easyflush^{EVO} Flushing cistern



Easyflush^{EVO} Sensor



REVOLUTIONARY FLUSHING VALVE - NO SEAL BELOW THE WATER LINE, NO LEAKS FROM THE FLUSHING SEAL

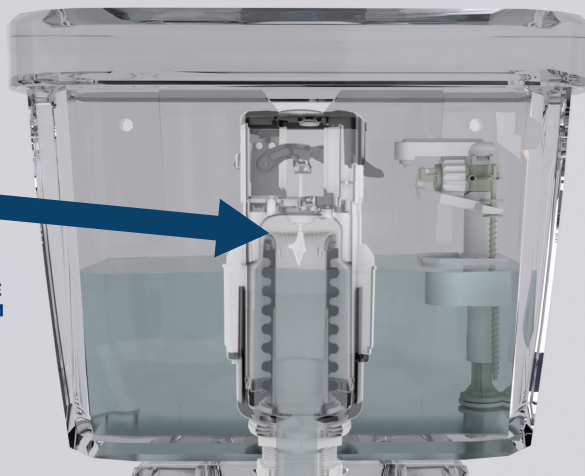

The multi-award winning Easyflush^{EVO} will not leak due to debris, scale, or degradation of the seal, as it has been designed without a flush seal below the water line, unlike traditional WC flush drop valves.

To activate a flush, the spill over level drops below the water line, saving up to 78,475 litres of water per unit per year.

Easyflush^{EVO} is easy install, as a retrofit or new build installation.

Key features and benefits

- **Water saving and sustainable** - patented WC dual flushing valve
- **Save** - Product payback in as little as 8 months
- **Hygienic non-touch** - The non-touch solution is more hygienic and reduces the likelihood of cross contaminating pathogens
- **Intuitive user interface** - Assists the user with flush activation for part or full flushing and feedback for cistern refilling
- **Easy to install and maintain** - Height adjustable filling valve to suit most cisterns (60mm height adjustment)
- **Mains or battery power** - Choose either Mains Transformer or Battery Pack
- **No dependence on water pressure** - Easyflush^{EVO} flush valve
- **Protects against limescale** - self-cleaning flushing mechanism
- **Programmable flush volumes**
- **Manual flush override** - option available
- **Support** - environmental building schemes
- **Ease of use** - for elderly or people with reduced dexterity



3 YEAR
extended warranty






Easyflush^{EVO} WC dual flush valve with sensor

The Easyflush^{EVO} revolutionises WC flushing by bringing together the benefits of non-touch WC flushing. For use in cisterns with a 1.5" / 2" outlet.

Technical information

- **Pipe fitting EVO 1.5":** 1.5" outlet / EVO 2": 2" outlet
- **Sensor range** Wave (hand) ~10cm, Walkaway (body) ~50cm (~6cm for hand activation)
- **Power requirements** 6V DC from 4 x alkaline AA (LR6) batteries or 6V DC regulated from mains adaptor (1A fused spur required)
- **Ambient Temperature Range** Operating: 0 to 40°C

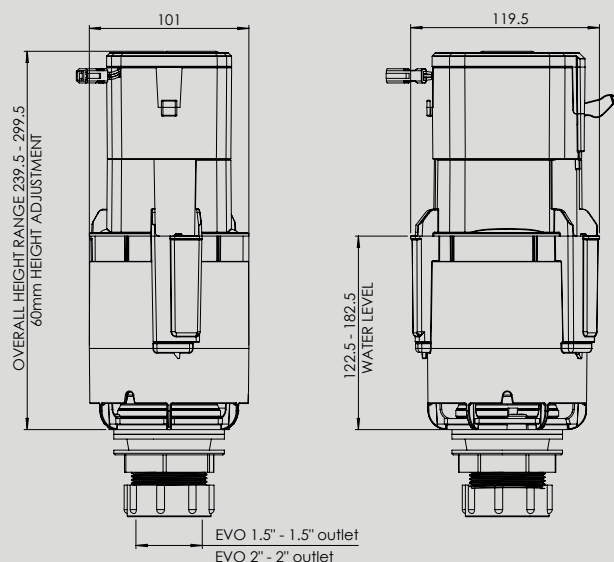


Measurements in millimetres (mm)

Easyflush^{EVO} Sensor WC Flushing Cistern

The Easyflush^{EVO} Sensor WC flushing kit delivers the Easyflush^{EVO} non-touch WC flush valve, complete with a delayed action fill valve, and a concealed cistern with a 2" flush pipe outlet and flush cone.

Technical information

- **Pipe fitting EVO CISTERN:** 2" flush pipe outlet
- **Sensor range** Wave (hand) ~10cm, Walkaway (body) ~50cm (~6cm for hand activation)
- **Power requirements** 6V DC from 4 x alkaline AA (LR6) batteries or 6V DC regulated from mains adaptor (1A fused spur required)
- **Ambient Temperature Range** Operating: 0 to 40°C

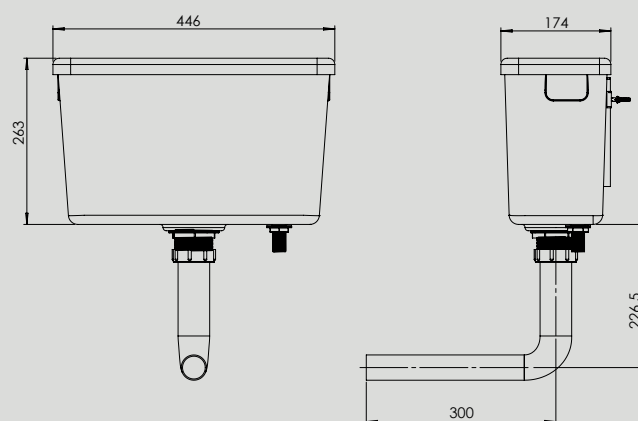

Measurements in millimetres (mm)

Installation

- Operating pressure: Easyflush^{EVO} dual flush valve is not dependant on water pressure. Fill valve (supplied with EVO CISTERN) 0.1bar - 10bar.
- Power: Battery and Mains options included as standard out of the box.
- Also available as an optional extra is an Multi-Product Power Supply Unit (PSUC) which can provide power for up to 10 Easyflush^{EVO} flushing valves, with only 1 fused spur required (additional costs apply).

Regulatory and Compliance

- WRAS: Approval Pending

Additional Parts / Optional Extras (additional costs apply)

- Multi Product Power Supply Unit (PSUC)
- Easyflush^{EVO} IFS extension cable 1.5m (IFS/10)
- Sensor side/front adaptor (SFA)
- Remote Control Programming Handset (ICU)

Cistermiser Limited

Unit 1 Woodley Park Estate, 59-69 Reading Road, Woodley, Reading, Berkshire RG5 3AN. Cistermiser is part of Genuit Group plc. Cistermiser Ltd reserves the right to amend images and specification without prior notice.

