

Novatap

Non-touch Tap



The Novatap offers the optimum in hygiene standards by boasting an automatic 12-hour hygiene flush feature, that is easy to set up, to prevent the build-up of stagnant water which can harbour legionella if not flushed regularly, while the non-touch, infrared control activation reduces the risk of cross contamination, while cutting water usage, increasing efficiency, saving energy and minimising costs.

The Novatap is available in stylish chrome and is easy to install, as retrofit or new build installations. The Novatap has been intelligently designed with an external solenoid to ensure quicker servicing and a safety shut-off, which automatically activates after 60 sec of continual water flow to minimise the risk of flooding.

The highly intelligent electronics, safeguard against misuse and vandalism, while offering an unwavering reliability which is required within a commercial washroom environment.

Key features and benefits

- **12 Hour hygiene flush** - option to prevent the potential build-up of stagnant water, which can create legionella bacteria growth (programmable with optional Remote Control (ICU)).
- **Improved hygiene** - minimise the risk of cross contamination
- **Non-touch** - Intuitive and easy to use. These non-touch solutions are more hygienic and reduce the likelihood of pathogens
- **Water and energy saving** - the water only runs when your hands are within range, so less water to heat. Water saving and energy efficient is more cost effective
- **Easy to install and maintain** - easy to retrofit and swap out existing manual taps. External solenoid for easier servicing
- **Mains and battery power** - options out of the box
- **Safety shutoff** - after 60 seconds of continuous water activation, the tap will automatically shutoff the flow of water to reduce the risk of flooding
- **Support** - environmental building schemes
- **Ease of use** - for elderly or people with reduce mobility
- **WRAS approved**
- **Optional extras** - Copper inlet pipes can be provided (additional costs apply)




3 YEAR
extended
warranty

Deck-mounted single supply basin tap, with infrared sensor for hygienic hands-free non-touch operation, mains or battery-powered external valve and 3.5 or 5.0 litre per minute flow rate options

Technical information

- **Dimensions** 200mm W x 147mm H x 45mm D, Spray nozzle height above basin surface 127mm, Spray nozzle projection from tap body 120mm
- **Mounting requirements** Any horizontal surface up to 40mm in thickness, requires a hole of 32.5-36mm in diameter
- **Water supply** 0.5 to 6 bar operating pressure
- **Sensor range** Up to 18cm
- **Run-on time** 2 seconds
- **Power requirements** 6V DC from 4 x alkaline AA (LR6) batteries or 6V DC regulated from mains adaptor (1A fused spur required)
- **Battery life** 200,000 activations (flashing LED indicates batteries are low and need to be replaced)

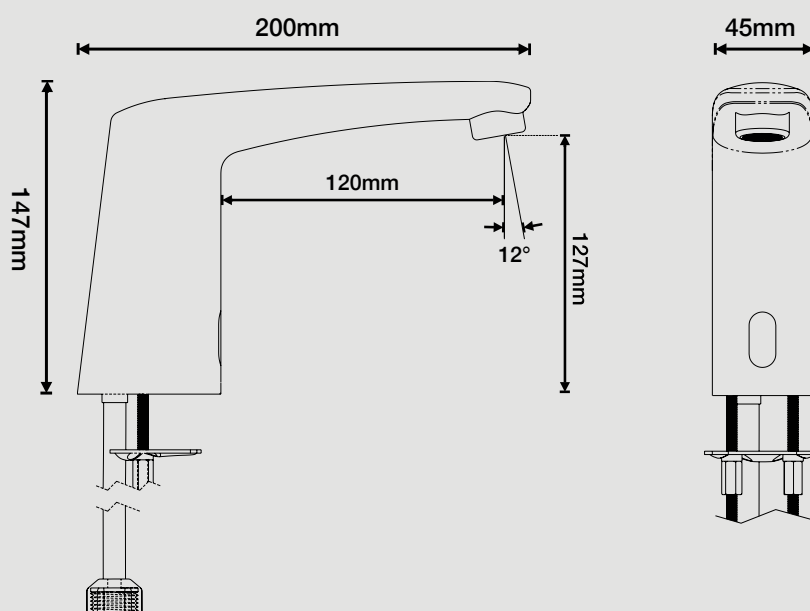

Measurements in millimetres (mm)

Installation

- Operating pressure: 0.5 bar - 6 bar.
- Power: Battery and Mains options included as standard out the box.
- Also available as an optional extra is a Multi-Product Power Supply Unit (PSUC) which can provide power for up to 30 Novataps, with only 1 fused spur required (additional costs apply).
- Pipe fitting requirements: 15mm compression fitting (included).

Regulatory and Compliance

- BREEAM: Wat 1 (5 lpm fitted, 3.5 lpm in the box)
- WRAS approved
- European water label
- UKCA / CE

Additional Parts / Optional Extras (additional costs apply)

- Copper inlet tube
- Multiple-Product Power Supply Unit (PSUC)
- Remote Control Programming Handset (ICU)

Cistermiser Limited

Unit 1 Woodley Park Estate, 59-69 Reading Road, Woodley, Reading, Berkshire RG5 3AN. Cistermiser is a subsidiary of Davidson Holdings Ltd. Cistermiser Ltd reserves the right to amend images and specification without prior notice.

